

The Solar Imaging Radio Array: Space-Based Imaging of Solar, Heliospheric, Magnetospheric, and Astrophysical Sources at Frequencies below the Ionospheric Cutoff

R. J. MacDowall, N. Gopalswamy, M. L. Kaiser

*NASA Goddard Space Flight Center, Code 695, Greenbelt, MD 20771,
USA*

S. D. Bale

*Physics Department and Space Sciences Laboratory, University of
California, Berkeley, CA 94720, USA*

L. D. Demaio

*NASA Goddard Space Flight Center, Code 593, Greenbelt, MD 20771
USA*

J. N. Hewitt, J. C. Kasper, A. J. Lazarus

*Massachusetts Institute of Technology, Center for Space Research,
Building 37-673, 77 Massachusetts Avenue, Cambridge, MA 02139,
USA*

R. E. Howard

*Orbital Sciences Corporation, Space Systems Group, 21829 Atlantic
Blvd., Dulles, VA 20166, USA*

D. L. Jones

*Jet Propulsion Laboratory, California Institute of Technology, Mail
Code 138-308, 4800 Oak Grove Dr., Pasadena, CA 91109, USA*

M. J. Reiner

*The Catholic University of America, 620 Michigan Ave. N.E.,
Washington, DC 20064, USA*

K. W. Weiler

Naval Research Laboratory, Code 7213, Washington, DC 20375, USA

Abstract. Solar Imaging Radio Array (SIRA) is a mission concept for space-based, interferometric imaging of solar and interplanetary radio emission at frequencies below the Earth's ionospheric cutoff. Observing in a frequency range of ~ 30 kHz to 15 MHz, SIRA will observe the radio emission from shocks driven by fast coronal mass ejections (CMEs). The radio emissions permit tracking the leading boundaries of CMEs from $\sim 2 R_s$ to 1 AU. When a CME impacts Earth's magnetosphere, the dynamic response will be imaged in the light of magnetospheric radio emissions, such as auroral kilometric radiation (AKR), scattered on magnetospheric density gradients. The near-term possibility for a SIRA mission is based on a NASA MIDEX-class mission, consisting of a single constellation of

~16 microsats located quasi-randomly on a spherical shell of ~10 km diameter. Such a mission is the logical next step in space-based solar radio observations, as well as offering a unique space weather prediction capability for the NASA Exploration Initiative. SIRA will also serve a valuable role as a pathfinder for more complex constellation and interferometry missions.

1. Introduction

Radio astronomy has provided unique insights into solar phenomena and other extra-terrestrial sources for more than half a century. Greater sensitivity and higher angular resolution have been obtained by constructing larger dish antennas and multi-antenna arrays. At frequencies below the ionospheric cutoff (~10-15 MHz during the day), the Sun and other radio sources must be observed from space. To date, high resolution imaging at these frequencies has not been possible; almost all space-based radio observations have been made by single, spinning spacecraft with wire boom antennas or by single, 3-axis stabilized spacecraft with rigid mast antennas. Extensive studies of solar, planetary, and other radio sources have been made by the International Sun-Earth Explorer-3, Voyager-1 and 2, Galileo, Ulysses, Geotail, Wind, Polar, Cassini, and other missions, but none of these spacecraft can produce an image of a radio source. Their data are restricted to, at most, the flux density, polarization, mean source direction, and a modeled angular source radius as a function of frequency and time (as in Figure 1). The NASA STEREO mission will launch in 2006, and the two STEREO spacecraft will permit the triangulation of the centroids of radio sources using the mean source directions from the two spacecraft. This will enhance the tracking of radio sources as they propagate outward from the Sun, but the detailed structure of the radio sources will remain unknown.

Low-frequency radio imaging is the logical next step, and current technology is ready for such radio imaging missions. Ground-based arrays such as the Long Wavelength Array and the Low Frequency Array will provide unprecedented sensitivity and resolution at the lowest frequencies observable from the ground. Space-based microsatellite constellations can be used to conduct aperture synthesis imaging of radio sources in the solar corona, inner heliosphere, and terrestrial magnetosphere with high angular resolution at frequencies below the ionospheric cutoff. Mapping of all sources on the celestial sphere (as discussed in section 2.5) above the sensitivity threshold can be achieved. In this paper, we describe such a space-based mission, the Solar Imaging Radio Array (SIRA).

In addition to providing the first radio-frequency images of solar events at frequencies below 30 MHz, SIRA will serve a significant role in the prediction of space weather, both in the vicinity of Earth and elsewhere. As described in section 2.1, radio emission is produced by shocks being driven by fast coronal mass ejections (CMEs). Such radio emissions provide early warning of the potentially-damaging space weather produced by CMEs impinging on Earth's

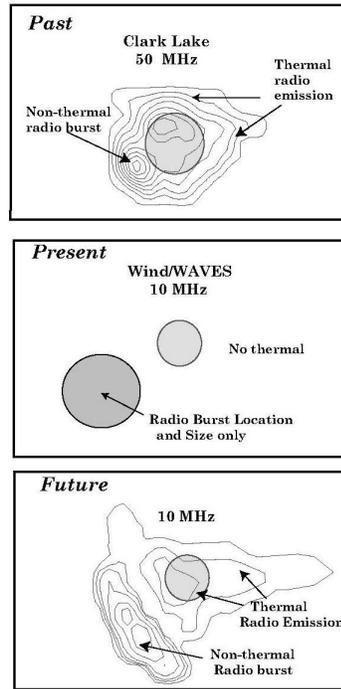


Figure 1. (Top) Intensity contours of solar thermal and non-thermal emissions imaged by the ground-based Clark Lake Radio Observatory at 50 MHz. (Middle) Radio burst information content from single spacecraft (e.g., Wind) at 10 MHz. (Bottom) Imaging of radio emissions at 10 MHz by SIRA for events comparable to (b).

magnetosphere, where they can generate geomagnetic storms. Images at radio frequencies provide unique data for determining the likelihood and time of arrival of storm-producing events. CMEs, shocks, and associated solar flaring and magnetic reconnection also produce intense fluxes of solar energetic particles (SEPs). Single spacecraft radio data play a role in the detection and early warning of such potentially dangerous radiation; radio imaging will provide a more detailed and informative perspective of the SEP emission sources.

2. SIRA Science and Space Weather Prediction Goals

The study of the nature and evolution of solar transient phenomena is essential to understanding the Sun-Earth connection. Phenomena such as solar flares, filament eruptions, fast mode shocks, and CMEs are manifested by distinct types of non-thermal radio bursts. The SIRA mission will image these radio bursts at frequencies corresponding to 2 to 200 solar radii from the Sun to reveal their spatial and temporal evolution and to permit remote sensing of coronal and interplanetary density and magnetic field structures between the Sun and Earth. The two major categories of radio bursts are type II bursts, which are produced by electrons accelerated at shocks, and type III bursts, which are produced

by flare-accelerated electrons. The radio observations are complementary to white light (coronagraph/all-sky imager) observations because the mechanisms responsible for radiation in the two bands are different and because coronagraphs do not image the CME-driven shock.

The primary solar-terrestrial science goals of the SIRA mission are to:

- Image and track the propagation of CMEs in the interplanetary medium to improve understanding of their evolution, to distinguish unambiguously between Earth-directed and non-Earth-directed CMEs, and to predict their arrival times at Earth and other planets for space weather forecasting purposes.
- Image large-scale interplanetary magnetic field topology and density structures, such as coronal streamers, coronal holes, and the heliospheric current sheet, to improve and extend existing coronal and solar wind models of the inner heliosphere that relate to CME propagation.
- Enhance understanding of particle acceleration in flares and in shocks driven by CMEs and provide new insights into the radio emission mechanisms.
- Provide global imaging of the terrestrial magnetosphere illuminated by natural terrestrial radio emission to better understand the response of the magnetosphere to the impact of major space weather events like CMEs.

As a direct consequence of its imaging capabilities, SIRA offers the following specific information for space weather prediction:

- Atypical, complex type III radio bursts provide early warning of SEP events (Cane et al., 2002; MacDowall et al., 2003). These complex type III bursts have a unique appearance when they occur behind the limb of the Sun; therefore, they provide a prompt indication of potential SEP events in the near Earth environment or elsewhere in space due to flares occurring behind the limb.
- Multi-frequency images of type II radio emission produced by shocks driven by fast CMEs permit tracking the velocities of multiple regions of the shock and, potentially, of the leading edge of the CME (Reiner et al., 2001).
- Images of complex type III bursts and type II burst intensifications may provide sufficient information to serve as proxies for SEP event intensity (Gopalswamy et al., 2003).

2.1. CMEs and type II radio bursts

Fast CMEs drive shocks in front of them as they propagate out of the corona into the interplanetary medium. The shocks accelerate electrons, which stream away from the shock, exciting electrostatic plasma waves (Bale et al., 1999, and references therein). According to the generally-accepted theory, the plasma waves decay into electromagnetic (radio) emissions at the fundamental frequency (f_p) and the second harmonic frequency ($2 f_p$) of the plasma electron oscillations. These radio waves are detected remotely by ground-based or spacecraft radio receivers, depending on the emission frequency, which decreases with distance from the Sun. As illustrated in Figure 2, this radio emission serves as a precursor of the CME leading edge as it propagates away from the Sun.

In addition to direct imaging of the shock-associated type II radio emission, there is an indirect method of observing CMEs using radio bursts. During the 1 to 4 days required for a CME to travel from the Sun to 1 AU there will be many type III radio bursts occurring behind the CME. The CME density enhancements will occult bursts occurring behind the CME, permitting it to be

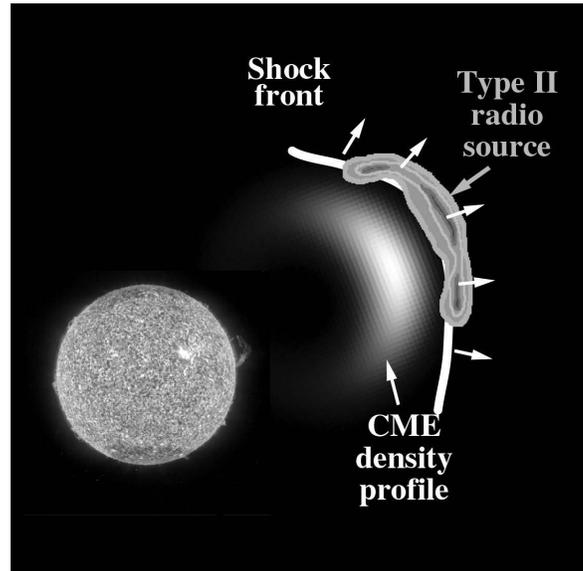


Figure 2. Schematic of CME-driven shock that produces type II radio emission. SIRA would image the type II burst and potentially locate the overdense region of the CME by occultation of other sources.

detected by the reduction of radio intensity. Furthermore, this method accurately measures the density profile in the CME since the density N is given by the observed frequency f_o of occultation [N (in cm^{-3}) = $(f_o$ (in kHz)/9) 2] - no assumptions are needed about column density between source and observer. As illustrated schematically in Figure 2, this will provide the first large-scale picture of where the CME-driven shock lies relative to the CME piston material as they propagate through the interplanetary medium. Since both the density profile and radio emission will be measured by the same instrument, ambiguities typically involved in comparing radio and white-light images are eliminated

2.2. Mapping of interplanetary density structures

SIRA will map interplanetary density structures inside 1 AU by the direct and indirect imaging techniques described above. By combining images at different frequencies, snapshots of density structures will be generated, such as extensions of coronal streamers and the heliospheric current sheet, throughout the inner heliosphere. During the active phase of the solar cycle type III radio bursts occur frequently and many such snapshots will be combined to follow the evolution of the various structures and their effects on CME propagation.

2.3. Particle acceleration and SEP events

SEP events are accelerated by coronal and IP shocks and possibly by CME-related magnetic reconnection (Cane et al., 2002). Intense SEP events present dangerous conditions for spacecraft and astronauts. Radio data from the Wind spacecraft show that almost all intense SEP events have characteristic 100 kHz - 14 MHz fast-drift radio emission (MacDowall et al., 2003). These complex

type III bursts have attracted attention because of uncertainty about the SEP acceleration source(s). SIRA imaging will permit association of the complex radio features with structures in the outer corona, leading to an improved understanding of SEPs and possible better warning of their arrival at 1 AU.

During solar maximum, the CME rate is about half a dozen per day. Only a small fraction of CMEs are involved in the production of geomagnetic storms or major SEP events. Type II radio bursts observed in the outer corona (1-20 MHz) and large SEP events are associated with fast and wide CMEs and the shocks that they produce at 1 AU (Gopalswamy et al., 2003). Imaging of the type II events will provide an indication of the shock direction and a more accurate interpretation of its speed. Combining these data, it is possible to identify the 1-2% of CMEs that are SEP-effective out of the thousands of CMEs that occur.

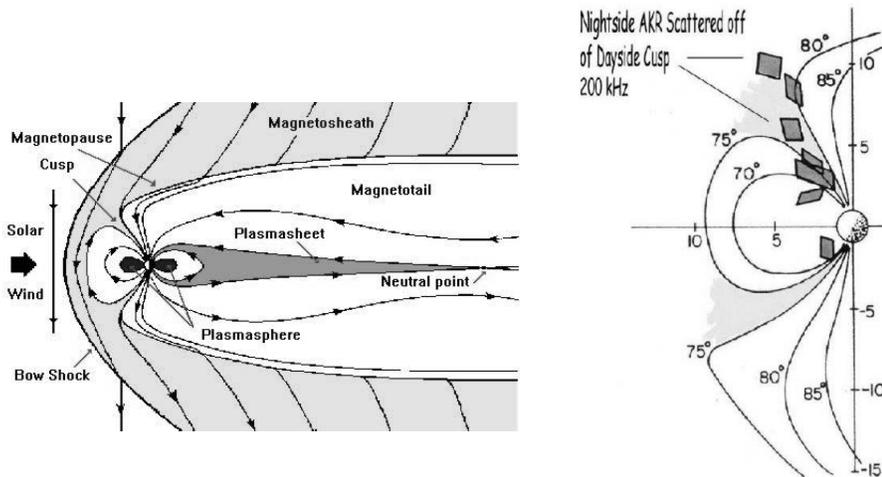


Figure 3. (Left) Schematic of terrestrial magnetosphere. Darker areas are more dense and produce greater scattering of natural radio emissions. (Right) Magnetospheric emission (AKR) near 200 kHz scattered off of the dayside cusp, from Radio Astronomy Explorer-2 observations (Alexander et al., 1979).

2.4. Terrestrial magnetospheric response

The geoeffective disturbances that originate from the Sun are fast solar wind streams and coronal mass ejections. The fast streams emanate from coronal holes and produce recurring geomagnetic storms with a 27-day periodicity. The non-recurring (and currently less predictable) geomagnetic storms are caused by CMEs, which pose the greatest danger to ground-based and space-borne technological systems. CMEs interacting with Earth's magnetosphere can result in geomagnetic storms capable of damaging satellite and electric utility systems and disrupting communications and GPS navigation services. The radiation hazard associated with solar disturbances can also pose a threat to astronauts.

At frequencies below a few hundred kHz, Earth's naturally-occurring radio emissions, such as Auroral Kilometric Radiation (AKR), will delineate regions of near-Earth space with strong gradients in the plasma and magnetic fields

(see Figure 3). AKR is scattered by density irregularities in the dayside cusp, magnetosheath, and magnetotail, essentially illuminating the entire magnetosphere (Alexander et al., 1979). SIRA will produce images of the terrestrial magnetosphere precisely when the most interesting solar wind-magnetosphere interactions, such as magnetic reconnection, are taking place.

2.5. Astrophysics science goals

The SIRA mission will produce high-sensitivity, high-resolution radio images of the entire sky at frequencies below 15 MHz. Many physical processes involved in the emission and absorption of radiation are only observable at low radio frequencies. For example, the coherent emission associated with electron cyclotron masers, as seen from the giant planets, Earth (AKR), and several nearby stars, is not only expected to occur and be detectable elsewhere in the galaxy but to be ubiquitous. Incoherent synchrotron radiation from fossil radio galaxies will be detectable by SIRA, revealing the frequency and duration of past epochs of nuclear activity. The multi-frequency, all-sky radio images produced by SIRA will allow the spectra of known galactic and extragalactic objects to be extended to much lower frequencies. This will provide unique information on galactic evolution, matter in extreme conditions, and life cycles of matter in the universe. It is also likely that unexpected objects and processes will be discovered by SIRA. A major cornerstone of the SIRA mission is the high potential for discovery.

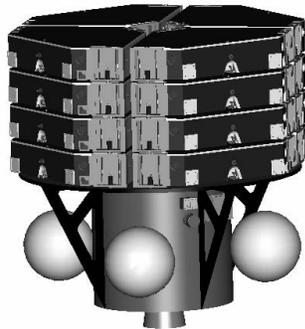


Figure 4. Sixteen SIRA microsats stacked on the carrier/deployment bus.

3. SIRA Mission Description

3.1. Basic requirements for the SIRA mission

The SIRA mission will consist of 12 to 16 microsatellite buses that will be almost identical (Figure 4). (A possible difference, for example, would be if only three of the microsats were instrumented to transmit timing signals to the constellation.) Communication with each microsat will consist of uplinks from and downlinks to the ground; inter-microsat communication will be limited (as described below) so that the loss of one or more microsats does not impair the scientific mission. The minimum science mission requires 10 microsats to provide a sufficient number of

baselines for useful observation. (The number of interferometric baselines for N satellites is $N * (N - 1)/2$.) The prime mission lifetime will be two years, with a total lifetime goal of four years.

The spacecraft orbit proposed for this mission is a halo orbit at the L1 Lagrange point; such an orbit is ideal for solar monitoring. An alternate orbit is a retrograde orbit around Earth at a distance of approximately 500,000 km. Such an orbit appears to orbit Earth in the direction opposite to the orbit of the moon. The retrograde orbits have been shown to be stable with minimal evolution of the constellation.

Launch into either of these orbits will require the capability of a Delta II (Figure 5a). A lunar flyby will be used to provide a rapid insertion into the desired orbit. An additional propulsion stage will likely be required to complete the orbit insertion, after which the microsats would be deployed from their carrier (Figure 5b). The microsats will be deployed into quasi-random locations on a spherical shell of 10 km diameter. Later in the mission, the diameter of this shell may be increased up to 50 km, to increase angular resolution.

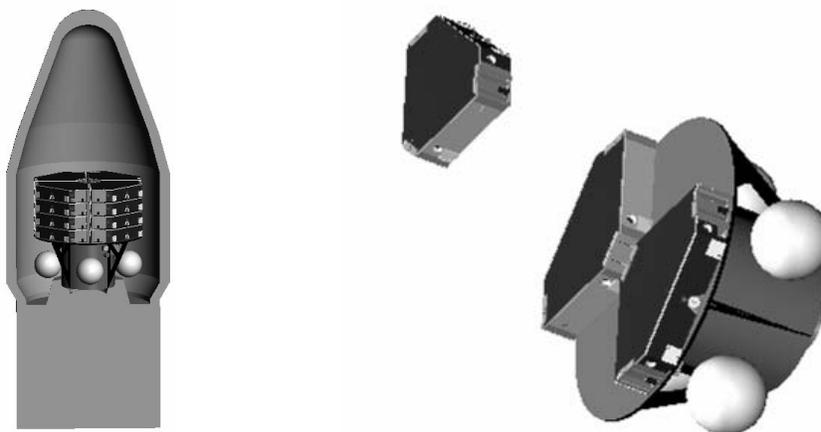


Figure 5. (Left) SIRA stack in Delta II fairing. (Right) Deployment of fourteenth SIRA microsat (of 16) from deployment bus.

Because of the data volume, an X-band or Ka-band downlink will be required. High gain antennas of either the dish or phased-array type will be pointed Earthward during the downlink. The data will be downlinked sequentially from each of the microsats. The total amount of science data collected per day will be at least 20 GB (see section 3.2). This is the quantity of 8 Mbps (X-band) data that could be dumped to one ground station during a 6 hour interval with approximately 1 hr total allowed for transitions from 1 microsat to the next. The receivers are capable of acquiring more data; it will be necessary either to reduce the number of frequencies or transmit less than 100% of the data collected to reach the 20 GB limit. If two ground stations are available, then SIRA could

observe continuously at ~ 16 log-spaced frequencies with 15 MHz as the highest frequency, generating almost 40 GB of science data per day.

3.2. SIRA Science Instruments

The basic instrumentation needed to acquire the radio data is two dipole antennas and two receivers per microsat. Each dipole antenna will consist of two 5m stacer BeCu monopoles mounted on opposite sides of the microsat. The two dipoles will be mounted at a 90° angle to each other. Mounting must be done in a manner that reduces the base capacitance to 100 pf or less. Each monopole and mount will weigh ~ 1 kg; 4 monopoles and mounts are required per microsat. Knowledge of the absolute orientations of the dipole axes to $\pm 1^\circ$ as a function of time is required for image processing.

Connected to each dipole will be a lightweight, low-power radio receiver programmed for interferometric data acquisition. A typical mode of operation will be to sequentially scan 16 frequencies logarithmically-spaced in the interval from 30 kHz to 15 MHz. The data will be 2-bit Nyquist sampled for bandwidths of one percent of the frequency. Each frequency would be sampled for one second or more before stepping to the next frequency. For 16 microsattellites and 16 frequencies with 15 MHz as the highest frequency, continuous science data for 24 hours would comprise 38.2 GB.

It is worthwhile to consider the constellation as the SIRA instrument, which facilitates understanding a number of requirements that interferometry imposes on the mission. Only when the data from the entire constellation are on the ground and processed will there be images of scientific value. To accomplish this, the relative ranges (baselines) of the microsats and the absolute orientation of the constellation must be known as a function of time. The relative ranges must be determined to ~ 3 m, which is ~ 0.15 of a wavelength at 15 MHz. It is desirable to know the absolute orientation of the constellation to 0.5 deg; additional accuracy can be derived from post-processing of the data. During intervals between microsat ranging and orbital configuration determination, the relative and absolute positions of the microsats will be determined and maintained in a ground-based model. This model will be used to determine when individual microsats should be maneuvered to maintain their loosely-controlled positions on the shell.

There are three timing criteria that must be met by the microsats operating as an interferometer. Absolute time tagging of the data to 0.1 sec is required. For aperture synthesis, phase coherence and bit stream (relative timing) alignment are needed. The phase stability requirement will depend on the highest observing frequency and the longest coherent integration used. With the oscillators on each microsat phase-locked to a common reference signal from one of the phase-transmitting microsats (three are required for redundancy), the individual oscillators only need to be stable on time scales shorter than the phase lock loop time constant. The timing accuracy required for the bit stream alignment depends on the bandwidth used for correlation. A relative timing accuracy for bit stream alignment of $1 \mu\text{sec}$ will be adequate.

We have briefly addressed the following observation requirements: attitude control, relative ranging, absolute orientation, absolute timing, relative timing, and phase coherence. In general, these are the same constraints that would be

imposed on a ground-based radio interferometer, with the useful difference being that the longer wavelengths of space-based interferometry relax the magnitude of the constraints.

4. SIRA Data Analysis

The SIRA aperture synthesis data reduction has much in common with ground-based imaging observations at higher frequencies; however, a major challenge is the requirement to image the entire sky at the same time. This is necessary because individual radio antennas (dipoles) of reasonable size have very low directivity at these frequencies, which is the motivation for using an interferometer array. Consequently very strong radio sources will create sidelobes in directions far from their positions, and high dynamic range imaging will require that the effects of strong sources be removed from all sky directions, not just from the region immediately adjacent to the sources. This in turn requires an array geometry which produces highly uniform aperture plane coverage in all directions simultaneously, a requirement that no previous interferometer array has had to meet. A quasi-random distribution of antennas on a single spherical shell was found to provide excellent aperture plane coverage in all directions with a minimum number of antennas.

For SIRA, cross-correlation of the signals will be done on the ground in five steps. First, the data streams from all receivers will be aligned in time using knowledge of the array geometry. This will be done for each of a set of appropriately spaced positions (phase centers) on the sky. Second, the data streams associated with each phase center will be Fourier transformed to produce spectra. The time span of data used for the transforms will be less than the coherence time. Third, each spectrum will be examined for evidence of interference, and suspect frequency channels removed. Fourth, amplitude calibration will be applied to each spectrum. Finally, the spectra associated with each phase center will be cross-multiplied to produce the cross-power spectrum for each baseline. The cross-power spectrum contains the real and imaginary parts of the cross-correlation function, or equivalently, the baseline fringe amplitude and phase. The computing power required to cross-correlate all data in less than the observing time can be obtained from a small cluster of workstations.

Phase calibration of the array is provided by a carrier generated by one of the satellites, to which all satellite oscillators are locked. Amplitude calibration is provided by 1) periodically injecting a known calibration signal into the signal path between the antennas and low frequency receivers, 2) comparison with known astronomical sources at the high end of SIRA's frequency range, and 3) comparison with ground-based observations of solar bursts using antennas of known gain, such as would be provided by the Long Wavelength Array. The theoretical array sensitivity at 3 MHz is ~ 200 Jy in 5 seconds.

Based on imaging simulations, a dynamic range of 10^2 - 10^3 (depending on frequency) for relatively compact sources (≤ 100 beams in size) can be achieved. For very extended sources or for the lowest observing frequencies, the dynamic range will still be a few tens, which is entirely adequate for imaging strong, rapidly evolving sources.

Aperture synthesis imaging of very wide fields requires 3-D Fourier transforms, but regions of limited angular size (over which the effects of sky curvature are small) can be imaged with separate transforms in which one dimension is much smaller than the other two (Cornwall and Perley, 1992; Linfield, 1996). This approach lends itself to parallel processing. For the SIRA mission, the imaging problem is most difficult at the highest frequency (15 MHz) where the synthesized beam is smallest (~ 4 arcmin). We plan to make 1024×1024 pixel images with 50 arcsec pixels, so each image will cover an area of $14^\circ \times 14^\circ$. Thus, ~ 200 images are needed to cover the entire sky. Each image will require a 16 pixel Fourier transform in the radial direction to allow for sky curvature over the largest scale structure to which the data are sensitive. Each image will be divided into ~ 100 smaller areas which will each be deconvolved with the appropriate synthesized or dirty beam. All clean components are subtracted from the data for each field and each field is transformed again to produce residual images. This continues until no sidelobes remain. For intense solar bursts, snapshot images will be obtained without iterative processing.

5. Role of SIRA as a Technology Pathfinder

Of the many space missions being proposed with more than a dozen satellites, SIRA is among the easiest and least expensive to develop. The radio receivers are simple, light weight, low power, low cost instruments that do not constrain the microsats. The mission takes place in the moderate radiation environment of space beyond the magnetosphere. Requirements for spacecraft pointing and constellation control are easily met. Consequently, SIRA represents the opportunity to implement a constellation with a dozen or more spacecraft on a MIDEX budget.

SIRA is also a pathfinder for space-based interferometry. Because the mission observes at the longest wavelengths of the electromagnetic spectrum propagating in near-Earth space, all aspects of interferometric design become easier. The inter-microsat ranging accuracy requirement is 3 m. The required constellation baselines are sufficiently long that there is no need for autonomous formation flying: spacecraft separations can be telemetered to the ground, where the needed maneuvers are determined and uplinked to the microsats. Nevertheless, the mission operations for SIRA would exercise all of the required functions relevant to a more demanding, shorter wavelength interferometric array in space.

With the conclusion of a successful SIRA mission, it would be appropriate to consider more advanced radio imaging missions. One possibility would be a SIRA Stereo mission, where two SIRA constellations would be inserted into separate orbits with one in an L1 halo or distant retrograde orbit around Earth, and the other in a heliocentric 1 AU orbit, gradually drifting away from Earth. The combined images from the two constellations would permit stereo viewing of the radio emissions in the interplanetary medium.

The ultimate goal for low-frequency radio astronomy is to operate radio observatories on the moon, including a far-side observatory that would be permanently shielded from natural and man-made terrestrial radio noise. Fixing very large number of antennas on the lunar surface provides high sensitivity and angular resolution. We envision a system where $\sim 10,000$ dipole anten-

nas and their connections to the central processing unit would be deposited on polyimide sheeting (Kapton, CP1, etc.), to be unrolled forming long (multi-kilometer) spokes, as suggested by Figure 6. Such observatories would provide the ultimate radio datasets for imaging solar, magnetospheric, and distant astrophysical sources.

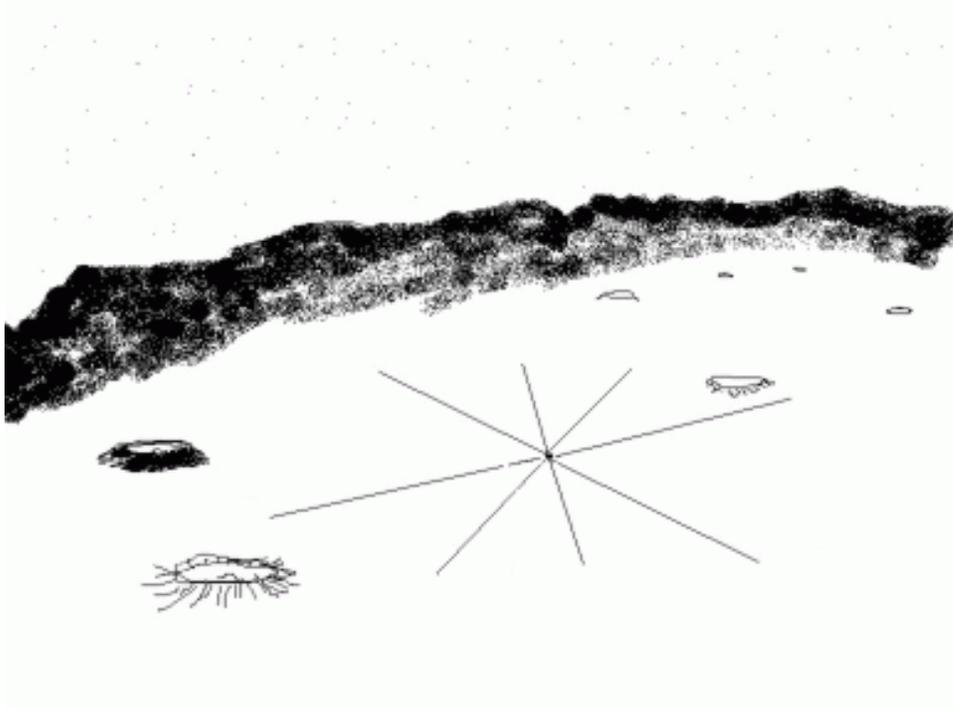


Figure 6. Concept for lunar low-frequency radio observatory based on spoke structure of long, narrow sheets of polyimide (Kapton, CP1, etc.), on which dipole antennas and leads are deposited.

Acknowledgments. RJM acknowledges with gratitude the guidance of Bill Erickson as his M.S. and early Ph. D. advisor, as well as his motivation of the Goddard Decametric Radio Telescope. The contributions of DLJ were carried out at the Jet Propulsion Laboratory, California Institute of Technology, under contract with the National Aeronautics and Space Administration.

References

- Alexander, J.K., Kaiser, M.L., & Rodriguez, P. 1979, *JGR*, 84, 2619
 Bale, S.D., et al. 1999, *GRL*, 26, 1573
 Cane, H.V., Erickson, W.C., & Prestage, N.P. 2002, *JGR*, 107, 1315
 Cornwell, T.J., & Perley, R.A. 1992, *A&A*, 261, 353
 Gopalswamy, N., et al. 2003, *GRL*, 30, 8015
 Linfield, R.P. 1996, *AJ*, 111, 2465
 MacDowall, R.J., et al. 2003, *GRL*, 30, 8018
 Reiner, M.J., Kaiser, M.L., Bougeret, J.L. 2001, *JGR*, 106, 29989